


Gerade Führungsschiene, Schwalbenschwanz

Lieferumfang: 1 Satz = Obere Führung + Rückführung + Abdeckplatte

Straight track section, Bevel

Supply: 1 set = carry plate + return plate + cover plate

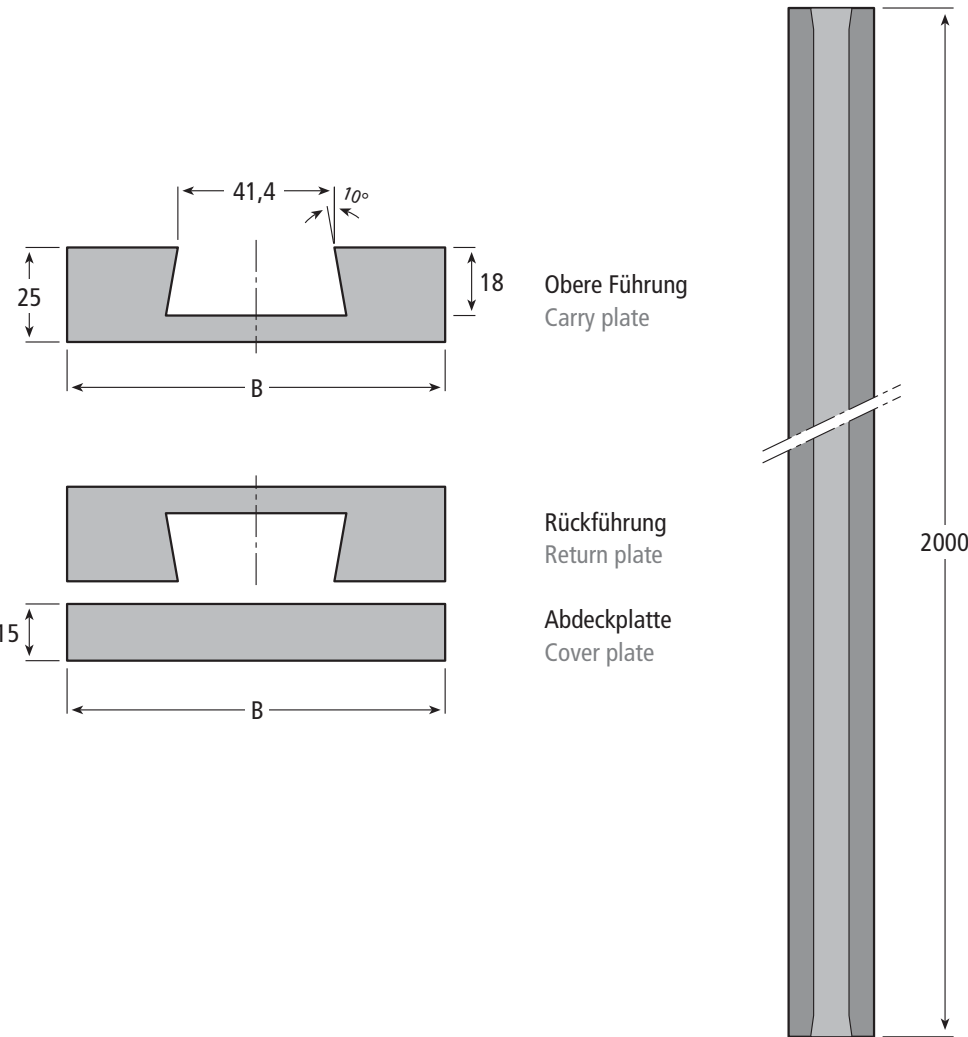

Gerade Führungsschienen Straight tracks

Unser ultrahochmolekulares Polyäthylen UHMWPE 1000 zeichnet sich aus durch :

- Hohe Verschleißfestigkeit
- Hohe Kerbschlagzähigkeit
- Geringe Gleitreibung
- Hohe Chemikalien- und Korrosionsbeständigkeit
- Keine Feuchtigkeitsaufnahme
- Schwingungs- und geräuschkämpfend
- Höchstzulässige Dauerbetriebstemperatur an der Luft: 90° C

Weitere Abmessungen auf Anfrage möglich.

Our ultra high molecular weight polyethylene UHMWPE 1000 with characteristic features such as :

- High abrasion resistance
- High notched impact strength
- Low coefficient of friction
- High chemical and corrosion resistance
- No absorption of humidity
- Absorbing vibration and noise
- Max. continuous service temperature in air: 90° C

Further dimensions upon request.

Artikel Nr. / Part No.		Breite, einspurig Single lane width B in mm	für Kettenserien for chains series	Ketten-Breite Chain width mm
Führungsschiene Carry / return plate	Abdeckplatte Cover plate			
208.0055-0325	208.0055-0325P	100	879 - K325	82,5
			880 - K325	
			881 - K325	
			8811 - K325	
208.0055-0450	208.0055-0450P	130	879 - K450	114,3
			880 - K450	
			881 - K450	
			8811 - K450	
208.0055-0750	208.0055-0750P	200	879 - K750	190,5
			880 - K750	
			881 - K750	
			8811 - K750	

Farbe / Colour: ■






Gerade Führungsschiene, TAB


Lieferumfang: 1 Satz = Obere Führung + Rückführung

Straight track section, TAB


Supply: 1 set = carry plate + return plate

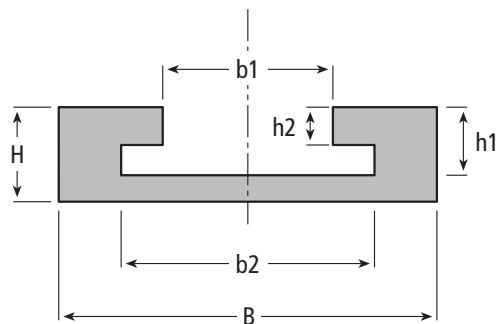

Obere Platte
Carrying plate

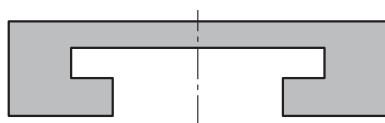

Untere Platte
Return plate

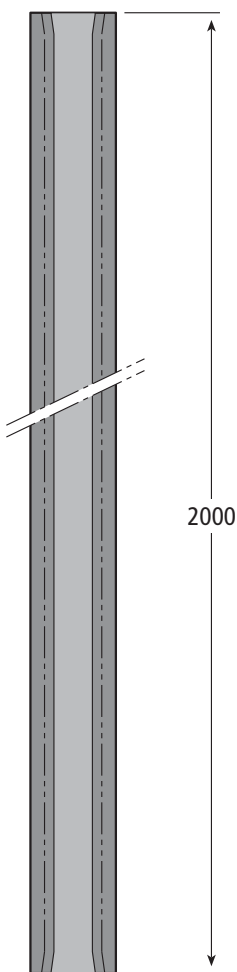

Gerade Führungsschienen Straight tracks

Artikel Nr. Part No.	Breite, einspurig Single lane width B in mm	Abmessungen Dimensions in mm					für Kettenserien for chains series	Ketten-Breite Chain width mm
		H	b1	b2	h1	h2		
208.0054-0325	100	25	45	67	18	10	878 TAB - K325	82,5
							879 TAB - K325	
							880 TAB - K325	
							881 TAB - K325	
							8811 TAB - K325	
208.0054-0450	130	25	45	67	18	10	878 TAB - K450	114,3
							879 TAB - K450	
							880 TAB - K450	
							881 TAB - K450	
							8811 TAB - K450	
208.0054-0750	200	25	45	67	18	10	878 TAB - K750	190,5
							879 TAB - K750	
							880 TAB - K750	
							881 TAB - K750	
							8811 TAB - K750	

Farbe / Colour: ■

Unser ultrahochmolekulares Polyäthylen UHMWPE 1000 zeichnet sich aus durch :

- Hohe Verschleißfestigkeit
- Hohe Kerbschlagzähigkeit
- Geringe Gleitreibung
- Hohe Chemikalien- und Korrosionsbeständigkeit
- Keine Feuchtigkeitsaufnahme
- Schwingungs- und geräuschkämpfend
- Höchstzulässige Dauerbetriebstemperatur an der Luft: 90° C

Weitere Abmessungen auf Anfrage möglich.

Artikel Nr. Part No.	Breite, einspurig Single lane width B in mm	Abmessungen Dimensions in mm					für Kettenserien for chains series	Ketten-Breite Chain width mm
		H	b1	b2	h1	h2		
208.0053-0375	110	30	60	84	24	15	882 TAB - K375	95,5
							LBP 882 TAB - K375	
208.0053-0450	130	30	60	84	24	15	882 TAB - K450	114,3
							LBP 882 TAB - K450	
208.0053-0750	200	30	60	84	24	15	882 TAB - K750	190,5
							LBP 882 TAB - K750	
208.0053-1000	270	30	60	84	24	15	882 TAB - K1000	254
							LBP 882 TAB - K1000	
208.0053-1200	320	30	60	84	24	15	882 TAB - K1200	304,8
							LBP 882 TAB - K1200	

Farbe / Colour: ■

Our ultra high molecular weight polyethylene UHMWPE 1000 with characteristic features such as :

- High abrasion resistance
- High notched impact strength
- Low coefficient of friction
- High chemical and corrosion resistance
- No absorption of humidity
- Absorbing vibration and noise
- Max. continuous service temperature in air: 90° C

Further dimensions upon request.

