


T-Profile für Duplex-Ketten nach ISO 606 (DIN 8187)

Chain guide profiles "T"
for duplex roller chains
acc. ISO 606

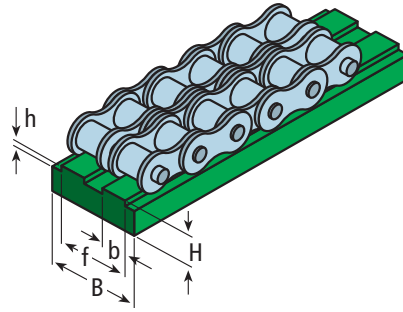


Artikel Nr. Part No.	ISO No.	Teilung Pitch	Abmessungen / Dimensions in mm				
			B	H	b	h	f
214.0067	06B-2	$\frac{3}{8} \times \frac{7}{32}$ "	25	10	5,5	1,5	15,7
214.0068	08B-2	$\frac{1}{2} \times \frac{5}{16}$ "	35	10	7,5	2,2	21,4
214.0160	08B-2	$\frac{1}{2} \times \frac{5}{16}$ "	35	15	7,5	2,2	21,4
214.0069	10B-2	$\frac{5}{8} \times \frac{3}{8}$ "	40	10	9,3	2,6	25,9
214.0051	12B-2	$\frac{3}{4} \times \frac{7}{16}$ "	45	10	11,3	2,4	30,8
214.0070	16B-2	1" x 17 mm	48,4	15	16,5	3,5	48,4
214.0071	20B-2	$1\frac{1}{4} \times \frac{3}{4}$ "	55,5	15	19	4,2	55,5
214.0072	24B-2	$1\frac{1}{2} \times 1$ "	73,1	20	24,7	5,5	73,1
214.0073	28B-2	$1\frac{3}{4} \times 31$ mm	89,7	25	30,1	6,8	89,7
214.0074	32B-2	2" x 31 mm	88,7	30	30,1	7,7	88,7

ca. Lieferlänge / approx. standard length: 2 m
Farbe / Colour: ■

CKG-Profile für Rollenketten nach ISO 606 (DIN 8187) ohne Stahlprofil

Chain guide profiles "CKG"
for simplex roller chains
acc. ISO 606 without steel profile

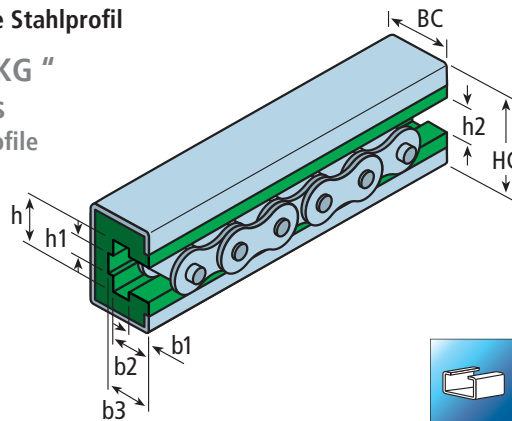

Seite
Page: 125

Artikel Nr. Part No.	ISO No.	Teilung Pitch	Stahl Steel	Abmessungen / Dimensions in mm							
				BC	HC	b1	b2	b3	h1	h2	h
214.0097	06B-1	$\frac{3}{8} \times \frac{7}{32}$ "	30/24	24	30	5,6	8,7	9,9	4	6,6	9,3
214.0098	083-1	$\frac{1}{2} \times \frac{3}{16}$ "	30/24	24	30	4,7	7,4	8,3	4	8	10,8
214.0099	085-1	$\frac{1}{2} \times \frac{1}{4}$ "	30/24	24	30	6,3	9,8	11,2	5	8	11,8
214.0100	085-1	$\frac{1}{2} \times \frac{1}{4}$ "	30/24	24	30	6,3	10,2	11,3	5	8,7	12,8
214.0101	08B-1	$\frac{1}{2} \times \frac{5}{16}$ "	30/24	24	30	7,5	11,5	12,7	5	8,7	12,8
214.0102		$\frac{5}{8} \times \frac{1}{4}$ "	30/24	24	30	6,3	10,3	11,7	6	10,4	15,4
214.0103	10B-1	$\frac{5}{8} \times \frac{3}{8}$ "	30/24	24	30	9,3	13,5	14,8	6	10,4	15,4
214.0104	12B-1	$\frac{3}{4} \times \frac{7}{16}$ "	30/24	24	30	11,5	15,9	17,5	7,9	12,3	16,9
214.0105	16B-1	1" x 17 mm	45/40	40	45	16	25,7	27,7	10	16,4	24
214.0106	20B-1	$1\frac{1}{4} \times \frac{1}{4}$ "	45/40	40	45	19	30	32	11	19,3	27,5

ca. Lieferlänge / approx. standard length: 2 m
Farbe / Colour: ■