

Rückführleiste Clip-on wear strip


Artikel-Nr. | Part No.

204.0168

ca. Lieferlänge


approx. standard length: 25 m

Farbe | Colour: ■



Gleitleisten Sliding rails


LK-Profile Flat bars snap on

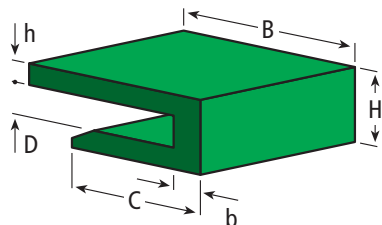

Artikel Nr. Part No.	Abmessungen Dimensions in mm						ca. Lieferlänge approx. standard length
	B	b	H	h	C	D	
204.0098	16	2,5	7	2	12	3	65 m
204.0056	18	2	10	5	9,5	3	50 m
204.0247	19,6	2,5	10	2,8	9,5	4,3	3 m
204.0057	20	3	9	3	13	3	50 m
204.0058	21	3	9	3	11,5	1,5-3,0	50 m
204.0234	22	4,5	10	3	10	3	6 m
204.0176	23	3	10	4	11	3	2 m
204.0287	23	4	11	4	10	3,5	2 m
204.0104	25	3	10,5	3	20	1,5-3,0	50 m
204.0109	25	4	12	4	14	3	2 m
204.0059	26	3	12,3	3,5	14	0,7-4,1	2 / 50 m
204.0183	35	4	14	3	12	8	2 m
204.0058-1	40	3	12	3	14	1,5-5,0	50 m
204.0105	40	10	8	3	25	3	2 m

Farben | Colours: ■ ■ □ je nach Verfügbarkeit | depending on stock

Z-Profile Wear strips "Z"

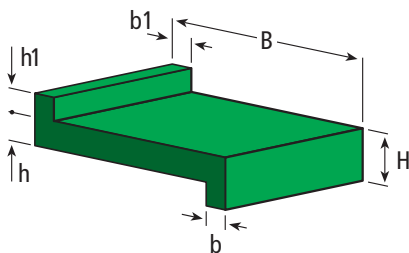

Artikel Nr. Part No.	Abmessungen Dimensions in mm						ca. Lieferlänge approx. standard length
	B	b	b1	H	h	h1	
204.0123	15	7	5	13	8	3	2 m
204.0169	17	9	5	13	8	3	2 m
204.0001	20	2	2	5,5	3	2,5	50 m
204.0231	20	3,5	4,5	5,5	3	2,5	2 m
204.0083	22	2	2	6	3,5	2,5	50 m
204.0040	23	3	3	7	4	5	50 m
204.0084-2	24	6	3	6	3	2,8	60 m
204.0017	23,5	3,5	3,25	7	4	5	60 m
204.0070	25	3	3	10	5	5	6 m
204.0193	25	5	5	9	3	4	60 m

Farben | Colours: ■ ■ □ je nach Verfügbarkeit | depending on stock

Fortsetzung der Tabelle auf der nächsten Seite
Continuation of table see next page

Unser ultrahochmolekulares Polyäthylen PE 1.000 UHMW zeichnet sich aus durch:

- Hohe Verschleißfestigkeit
- Hohe Kerbschlagzähigkeit
- Geringe Gleitreibung
- Hohe Chemikalien- und Korrosionsbeständigkeit
- Keine Feuchtigkeitsaufnahme
- Schwingungs- und geräuschkämpfend

Sonderlängen, -farben und -ausführungen auf Anfrage möglich.

Our ultra high molecular weight polyethylene PE 1,000 UHMW with characteristic features such as:

- High abrasion resistance
- High notched impact strength
- Low coefficient of friction
- High chemical and corrosion resistance
- No absorption of humidity
- Absorbing vibration and noise

Special lengths, colours and designs available upon request.

Profile ... Profiles ...




Fortsetzung der vorherigen Tabelle
Continuation of previous page

Artikel Nr. Part No.	Abmessungen Dimensions in mm						ca. Lieferlänge approx. standard length
	B	b	b1	H	h	h1	
204.0042	25,5	5,5	5,5	9	4	3	60 m
204.0327	26	6	2	10	4	8	2 m
204.0136	27	5	5	9	3	6	6 m
204.0331	30	6	8	12	3	8	3 m

Farben | Colours: ■ ■ □ je nach Verfügbarkeit | depending on stock


ZK-Profil Clip-on wear strips "Z"

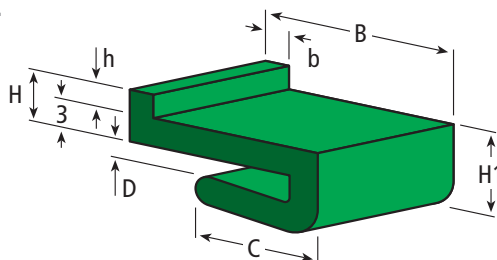

Artikel Nr. Part No.	Abmessungen Dimensions in mm							ca. Rollengröße approx. coil length
	B	b	H	H1	h	C	D	
204.0054	20	2,5	5,5	9	2,5	13	2-3	50 m
204.0002	21	1,8	5	9	2	11,5	1,5-3	50 m
204.0082	22	3	5	9	2	16	3	65 m
204.0107	25	2,5	5,5	9	2,5	13	2-3	50 m

Farben | Colours: ■ ■ □ je nach Verfügbarkeit | depending on stock

Doppel-Z-Profil Double Z-profiles

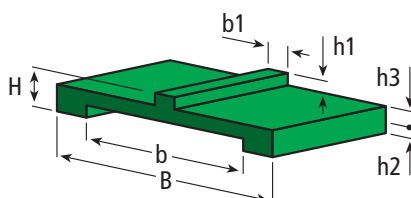

Artikel Nr. Part No.	Abmessungen Dimensions in mm							ca. Lieferlänge approx. standard length
	b	b1	h3	B	H	h1	h2	
204.0032	31	3	4	43	15	3	8	50 m
204.0008	31	5	3	37	11,5	2,5	6	2 / 3 m
204.0106	32	4	3	44	8	2,5	2,5	50 m
204.0035	35,5	4	3	40	7,5	2	2,5	50 m
204.0196	36	6,5	3	40	8	2,5	2,5	50 m
204.0049	38	6	3	46	14	2,5	8	6 m
204.0132	39	3,5	4	43	13	2	7	3 m
204.0024	40,2	6	3	46	11,5	2,7	3,3	50 m
204.0029	40,5	5	3,5	45	10	2,5	4	2 / 3 m
204.0048	41	4	3	46	11,5	2,5	6	50 m
204.0034	41	4	5,5	45	15	3	6,5	50 m
204.0050	41	5	5	46	17,5	2,5	10	6 m
204.0164	41	9	3,5	47	10	2,5	4	3 m
204.0252	45	20	3,5	54	12	2,5	6	2 m
204.0251	50	4	7	152	14	2	5	3 m

Farben | Colours: ■ ■ □ je nach Verfügbarkeit | depending on stock