



U-Profile, abgesetzt U-profiles, settled

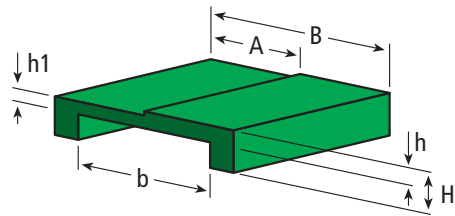

Artikel Nr. Part No.	Abmessungen Dimensions in mm						ca. Lieferlänge approx. standard length
	B	H	h	h1	A	b	
204.0080/2	42	9	3	2	21	31	2 m
204.0080/1	42	9	3	2,8	23	30,5	6 m
204.0191/1	41	14	9	3,5	21	31	2 m
204.0191/2	42	20	13	3	22	30,5	2 m
204.0133/1	43	18	11	4	23	38,5	2 m
Farbe Colour: ■							

Flachriemenführungen Flat belt guides

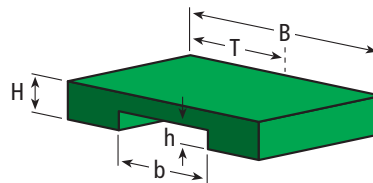

Artikel Nr. Part No.	Abmessungen Dimensions in mm					ca. Lieferlänge approx. standard length
	B	b	H	h	T	
214.0037	36	28	12	6	18	2 / 3 / 4 m
214.0268	40	20	10	7	20	2 m
204.0152	40	21	9	6	20	3 m
214.0228	40	24	7	2	17	1,1 m
214.0213	47	20	10	7	23,5	2 m
214.0142	50	28	12	6	25	2 m
214.0285	54	21	10	7	27	2 m
214.0217	54	31	9	5	27	3 m
214.0001	54	31	12	5	27	2 / 3 m
214.0042	55	38	12	5	27,5	2 m
214.0036	56	40	8	4	28	2 m
214.0240	57	30	10	6	28,5	2 m
214.0014	60	28	12	6	30	2 / 3 / 4 m
214.0354	60	28,8	12	6	30	3 m
214.0299	60	30	16	6	30	3 m
214.0043	60	30	12	6	30	2 / 3 m
214.0190	65	30	10	6	32,5	2 m
214.0218	65	31	12	6	32,5	2 m
214.0212	65	40	10	5	32,5	2 m
214.0141	70	28	12	6	35	2 m
214.0011	74	31	12	5	37	2 / 3 m
214.0041	74	38	12	5	37	2 m
214.0334	74	41	12	5	37	3 m
214.0045	80	28	12	6	30	2 / 3 m
214.0328	80	28	12	6	40	3 m
214.0368	80	28,1	20	5	34	3 m
214.0044	80	30	12	6	40	2 m
214.0229	80	30	12	6	30	2 m
214.0227	80	30	20	10	30	2 m
214.0039-3M	110	28	12	6	55	3 m
214.0199	110	31	12	6	55	2 / 3 m
214.0331	110	41	12	6	55	3 m
Farben Colours: ■ ■ □ je nach Verfügbarkeit depending on stock						